



Roofnado™ AnchorDeck™ PSU

AnchorDeck™ PSU is a self-adhered (high temp.) roofing underlayment for sloped roof applications. AnchorDeck™ PSU provides unmatched protection from ice dams, snow, storms, hail and wind-driven water. AnchorDeck™ PSU features a mechanical slip-resistant walking surface which provides superior steep-slope walkability.

To speed your projects up even more, AnchorDeck™ PSU has a split-release liner which helps increase productivity with faster and easier installs than single sheet liners. And for added confidence, AnchorDeck™ PSU's rubberized adhesion technology has an excellent combination of strong deck grip in low temperatures and high temperature flow resistance.

AnchorDeck™ PSU is designed for use under asphalt shingles, concrete and clay tiles, all metal panels, synthetic shingles and primed cedar shakes. AnchorDeck™ PSU meets all building code requirements including ASTM D226, ASTM D4869 and AC 48.

Features & Benefits


- Premium protection from Ice Dams, Snow, Storms, Hail & Wind Driven Water
- Mechanical slip resistant walking surface which provides superior steep slope walkability for roofers.
- split release liner for faster and easier installs
- Rubberized adhesion technology for stronger deck grip
- Miami-Dade County Product Control Approved
- Meets and exceeds ASTM D1970
- Meets the performance requirements of CAN/CSA A220.1
- Temperature range (40° to 240° F)
- ICC-ES ESR-4054
- FBC Approved – FL21895
- 90 Days UV Exposure
- 20 year warranty
- Custom dual-logo printing available

MIAMI-DADE COUNTY
APPROVED

Test/Standard*

Typical Value

Nominal thickness	40 mils
Weight per square	18.75 lbs
Nail Sealability ASTM D1970	Pass
Permeability ASTM E96	0.027 Perms
Temperature Range	40° F - 240° F
Tensile Strength ASTM D5034	MD 95 lbs (43 kg) CD 85 lbs (38.5 kg)
Tear Strength ASTM D4533	MD 25 lbs (11.3 kg) CD 20 lbs (9 kg)
Adhesion to Plywood ASTM D4869	2.4lbs/inch
Liquid Water Transmission ASTM D4869	Pass
Fire Rating ASTM E108	Class A
UV Exposure	3 Months

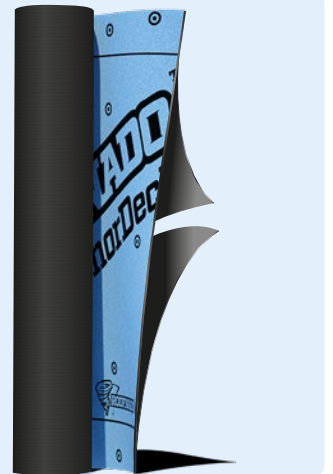

Roll/Pallet Specs

Length per roll:	67' / 20.4 m
Width per roll:	36" / 0.91 m
Weight per roll:	375 lbs / 17 kg
Roll size:	2 sq / 18.58 m ²
Rolls per pallet:	25
Pallet weight:	987.5 lbs / 448 kg

*Test data is based on average taken over several production runs and should not be considered or interpreted as minimum or maximum values. Values are typical data and not limiting specifications. All values ± 10 %. This product is manufactured in accordance with national standards which allow for non-critical variances in weights and measures.

†When correctly installed as per installation instructions. All product installation instructions are available to download or view from our website: www.roofnado.com

RN AD PSU SS SEP24

**Switch to Roofnado™
and start saving on labor,
time & money.
Contact us today!
www.roofnado.com**

